



Republic of the Philippines
CAVITE STATE UNIVERSITY
Don Severino de las Alas Campus
Indang, Cavite, Philippines
☎ (046) 889-6373
www.cvsu.edu.ph

INVITATION TO SUBMIT QUOTATION
Supply and Delivery of Various Supplies and Equipment for Cascading Activities of PAKAPE Project


1. The Cavite State University (CvSU) invites interested firms/supplier to submit quotation for the project **“Supply and Delivery of Supplies and Materials for Cascading Activities of PAKAPE Project”** with an Approved Budget for the Contract (ABC) of **One Hundred Fifty-Eight Thousand Pesos Only (PhP 158,000.00)**. Quotation received in excess of the ABC shall be automatically rejected at the opening.

Item No.	Unit	Description	Quantity	Unit Cost	Total Cost
1.	Units	Black Grading Mat/Flat-black poster brand	6	1,200.00	7,200.00
2.	Units	Refractometer	6	1,500.00	9,000.00
3.	Units	Digital PH Meter for Coffee	6	1,000.00	6,000.00
4.	Units	Maturity Board	6	1,200.00	7,200.00
5.	Units	Infrared Thermometer, Non-Contact, for food	6	3,000.00	18,000.00
6.	Units	Coffee Moisture Meter	2	10,000.00	20,000.00
7.	Pcs	Fermaestro (Fermentation Checker Tool)	6	2,000.00	12,000.00
8.	Pcs	Cupping bowl	72	500.00	36,000.00
9.	Pcs	Cupping bowl	48	450.00	21,600.00
10.	Units	Heavy duty Extension cord (4 to 8 Universal Outlets, 50 reeled wire length)	2	3,000.00	6,000.00
11.	Units	Portable Speaker (hand-carry) with microphone	3	5,000.00	15,000.00
		Please see attached image for reference			
TOTAL AMOUNT					158,000.00

2. Delivery Period: ____ calendar days from the receipt of P.O.
3. Price quotations must be valid for a period of sixty (60) calendar days from date of submission and shall include all taxes, duties and/or levies payable. Bidders shall also indicate the brand and model of the items being offered.
4. Warranty shall be for a period of six (6) months for supplies and materials. Warranty for equipment must not be less than one (1) year from the date of acceptance and shall be accompanied with Warranty Certificate.
5. The quotation must be submitted to the Procurement Office through mail, fax or email at the contact details listed below **on or before 5:00 PM of December 19, 2024**.


Address : Procurement Office, Administration Building
Cavite State University
Indang, Cavite
E-mail : procurementoffice@cvsu.edu.ph / rfqmain@cvsu.edu.ph
Telefax : (046) 889-6373

6. The CvSU reserves the right to reject any or all quotations and/or proposals and waive any formalities/informalities therein and to accept such bids it may consider as most advantageous to the agency and to the government. CvSU neither assumes any obligation for whatsoever losses that may be incurred in the preparation of bids, nor does it guarantee that an award will be made.



ROSELYN M. MARANAN

BAC Secretary, Goods and Consulting Services

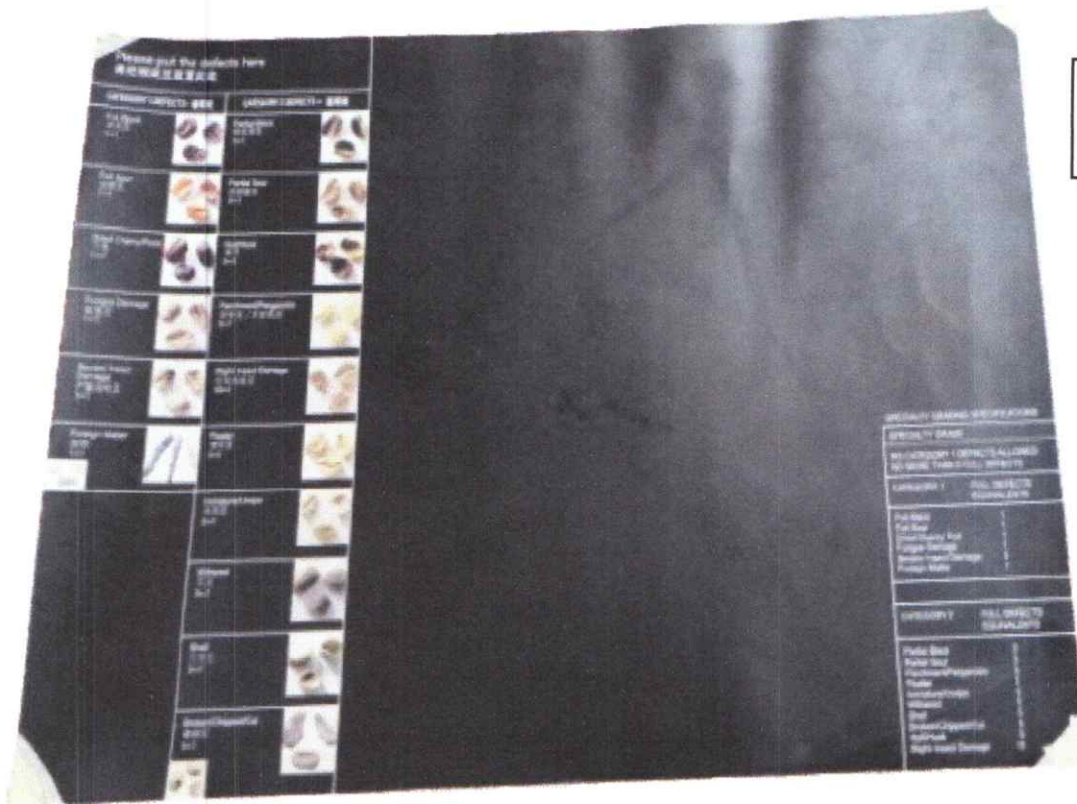

**BLACK GRADING MAT/
FLAT-BLACK POSTER
BOARD**

REFRACTOMETER



SPECIFICATIONS:

SCALE - Specific Gravity (SG) d20/20; Parts per Thousand (PPT) 0/00

RANGE - 0-100PPT; 1.000-1.070 SG

RESOLUTION - 1.0 PPT; 0.001 SG

ACCURACY - ± 1.0 PPT; ± 0.001 SG

AUTOMATIC TEMPERATURE COMPENSATION


RANGE - 50°F to 86°F (10°C to 30°C)

DIMENSION - 30 mm width x 205 mm length

WEIGHT - 207 grams


FOCUS - Manual, adjustable

DIGITAL PH METER

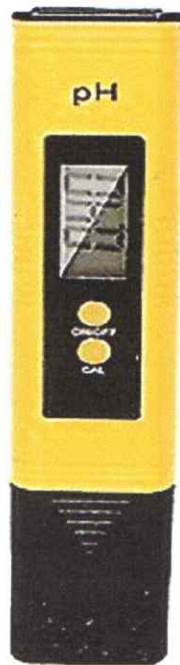

SPECIFICATIONS:

RANGE - 0.0 - 14.0 pH
RESOLUTION - 0.1 pH
BATTERY - 4X1.5W (AG-13)(Excluding battery)
TEMPERATURE COMPENSATION - 0.50°C
DIMENSION - 151x 30x 20mm
WEIGHT - 53g

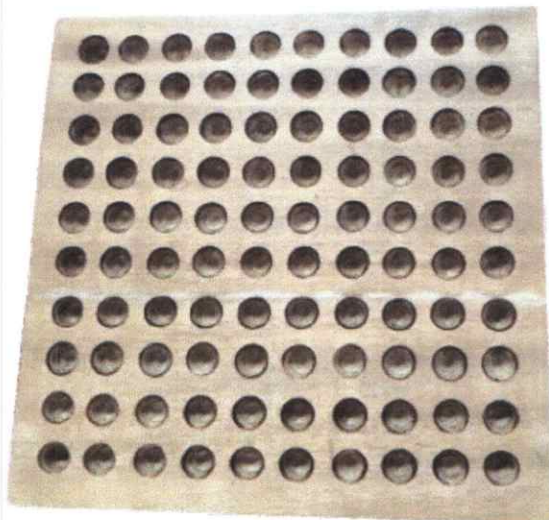

MATURITY BOARD

INFRARED THERMOMETER, NON-CONTACT



SPECIFICATIONS:

MEASUREMENT RANGE - 58°F to 1112°F (-50°C - 600°C)
DISPLAY RESOLUTION - 0.1°C or 0.1°F
EMISSIVITY - 0.1 - 0.99 (adjustable)
MULTIFUNCTIONAL - °C/°F conversion/Max/Min/Auto power off/Data hold/Laser ON/OFF/ Blacklight ON/OFF
POWER - 1.5V AAA battery* 2pcs

SPECIFICATIONS:

DIMENSIONS - 16,5 × 7,0 × 7,5 cm
WEIGHT OF THE DEVICE - 520 g (with batteries and the tightening cap)
SAMPLE'S CAPACITY - 90 ml
MEASUREMENT CONTROL - single-chip microcomputer
POWER SUPPLY - 4 batteries 1.5V type AA + 1 battery 3V type CR-2032
MEASUREMENT RESOLUTION - humidity – 0.1%, temperature – 0.1°C
HUMIDITY MEASUREMENT ACCURACY - ± 0.5 % for standart grain; ± 1 % in the range up to 10 % of moisture content; ± 1.5 % in the range over 10 % of moisture content and can increase if the sample's moisture content increase.
TEMPERATURE MEASUREMENT ACCURACY - ± 0.5°C in the range from 0°C to 85°C / ± 0.9°F in the range from 32°F to 185°F
TEMPERATURE MEASUREMENT RANGE - 0°C to 125°C
Internal memory capacity -
 – 50000 measurements with date and time
 – 20 external temperature probes recognised automatically on the basis of ID number
 – 20 language versions
 – 400 varieties

COFFEE MOISTURE METER



FERMAESTRO (FERMENTATION CHECKER TOOL)



CUPPING SPOON



CUPPING BOWL



HEAVY DUTY EXTENSION CORD (4 TO 8 UNIVERSAL OUTLET 5M REELED WIRE LENGTH)



PORTABLE SPEAKER WITH MICROPHONE

