

Republic of the Philippines CAVITE STATE UNIVERSITY

Don Severino de las Alas Campus

Indang, Cavite, Philippines

(046) 889-6373

www.cvsu.edu.ph

INVITATION TO SUBMIT QUOTATION Supply and Delivery of Various Supplies and Equipment for Cascading Activities of PAKAPE Project

 The Cavite State University (CvSU) invites interested firms/supplier to submit quotation for the project "Supply and Delivery of Supplies and Materials for Cascading Activities of PAKAPE Project" with an Approved Budget for the Contract (ABC) of One Hundred Fifty-Eight Thousand Pesos Only (PhP 158,000.00). Quotation received in excess of the ABC shall be automatically rejected at the opening.

Item No.	Unit	Description	Quantity	Unit Cost	Total Cost
1.	Units	Black Grading Mat/Flat-black poster brand	6	1,200.00	7,200.00
2.	Units	Refractometer	6	1,500.00	9,000.00
3.	Units	Digital PH Meter for Coffee	6	1,000.00	6,000.00
4.	Units	Maturity Board	6	1,200.00	7,200.00
5.	Units	Infrared Thermometer, Non-Contact, for food	6	3,000.00	18,000.00
6.	Units	Coffee Moisture Meter	2	10,000.00	20,000.00
7.	Pcs	Fermaestro (Fermentation Checker Tool)	6	2,000.00	12,000.00
8.	Pcs	Cupping bowl	72	500.00	36,000.00
9.	Pcs	Cupping bowl	48	450.00	21,600.00
10.	Units	Heavy duty Extension cord (4 to 8 Universal Outlets, 50 reeled wire length)	2	3,000.00	6,000.00
11.	Units	Portable Speaker (hand-carry) with microphone	3	5,000.00	15,000.00
		Please see attached image for reference			158,000.00
	TOTAL AMOUNT				

- Delivery Period: ____ calendar days from the receipt of P.O.
- 3. Price quotations must be valid for a period of sixty (60) calendar days from date of submission and shall include all taxes, duties and/or levies payable. Bidders shall also indicate the brand and model of the items being offered.
- 4. Warranty shall be for a period of six (6) months for supplies and materials. Warranty for equipment must not be less than one (1) year from the date of acceptance and shall be accompanied with Warranty Certificate.
- 5. The quotation must be submitted to the Procurement Office through mail, fax or email at the contact details listed below **on or before 5:00 PM** of **March 4, 2025.**

Address

Procurement Office, Administration Building

Cavite State University

Indang, Cavite

E-mail

procurementoffice@cvsu.edu.ph / rfqmain@cvsu.edu.ph

Telefax

(046) 889-6373

6. The CvSU reserves the right to reject any or all quotations and/or proposals and waive any formalities/informalities therein and to accept such bids it may consider as most advantageous to the agency and to the government. CvSU neither assumes any obligation for whatsoever losses that may be incurred in the preparation of bids, nor does it guarantee that an award will be made.

ROSELYN M. MARANAN

BAC Secretary, Goods and Consulting Services



BLACK GRADING MAT/ FLAT-BLACK POSTER BOARD

RANGE - 50°F to 86°F (10°C to 30°C)

WEIGHT - 207 grams FOCUS - Manual, adjustable

DIMENSION - 30 mm width x 205 mm length



DIGITAL PH METER




SPECIFICATIONS:

RANGE - 0.0 - 14.0 pH
RESOLUTION - 0.1 pH
BATTERY - 4X1.5W (AG-13)(Excluding battery)
TEMPERATURE COMPENSATION - 0.50°C
DIMENSION - 151x 30x 20mm
WEIGHT - 53g



MATURITY BOARD

INFRARED THERMOMETER, NON-CONTACT

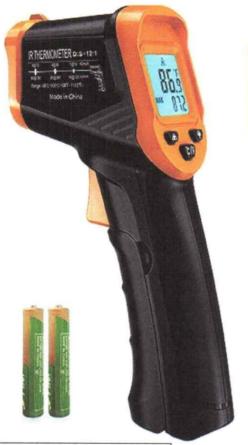



SPECIFICATIONS:

MEASUREMENT RANGE - 58°F to 1112°F (-50°C - 600°C)

DISPLAY RESOLUTION - 0.1°C or 0.1°F

EMISSIVITY - 0.1 - 0.99 (adjustable)

MULTIFUNCTIONAL - °C/°F

conversion/Max/Min/Auto power off/Data
hold/Laser ON/OFF/ Blacklight ON/OFF

POWER - 1.5V AAA battery*2pcs

SPECIFICATIONS:

DIMENSIONS - $16,5 \times 7,0 \times 7,5$ cm **WEIGHT OF THE DEVICE** - 520 g (with batteries and the tightening cap)

SAMPLE'S CAPACITY - 90 ml

MEASUREMENT CONTROL - single-chip microcomputer

POWER SUPPLY - 4 batteries 1.5V type AA + 1 battery 3V type CR-2032

MEASUREMENT RESOLUTION - humidity –

0.1%, temperature – 0.1°C **HUMIDITY MEASUREMENT ACCURACY** -

- ± 0.5 % for standart grain;
- $\pm\,1\,\%$ in the range up to 10 % of moisture content;
- $\pm\,1.5\,\%$ in the range over 10 % of moisture content and can increase if the sample's moisture content increase.

TEMPERATURE MEASUREMENT ACCURACY -

 $\pm\,0.5\,^{\circ}\text{C}$ in the range from 0°C to 85°C / $\pm\,0.9\,^{\circ}\text{F}$ in the range from 32°F to 185°F

TEMPERATURE MEASUREMENT RANGE - 0°C to 125°C

Internal memory capacity -


- 50000 measurements with date and time
- 20 external temperature probes recognised automatically on the basis of ID number
- 20 language versions
- 400 varieties

COFFEE MOISTURE METER





FERMAESTRO (FERMENTATION CHECKER TOOL)

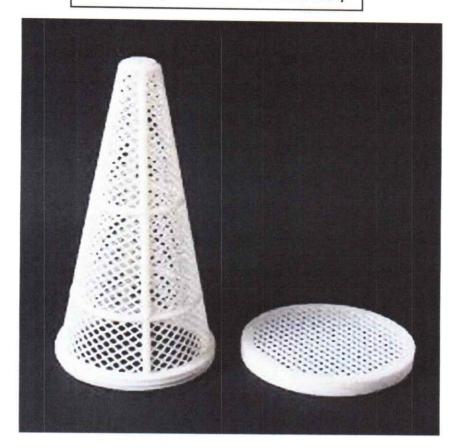


CUPPING SPOON



CUPPING BOWL



HEAVY DUTY EXTENSION CORD (4 TO 8 UNIVERSAL OUTLET 5M REELED WIRE LENGTH



PORTABLE SPEAKER WITH MICROPHONE

