

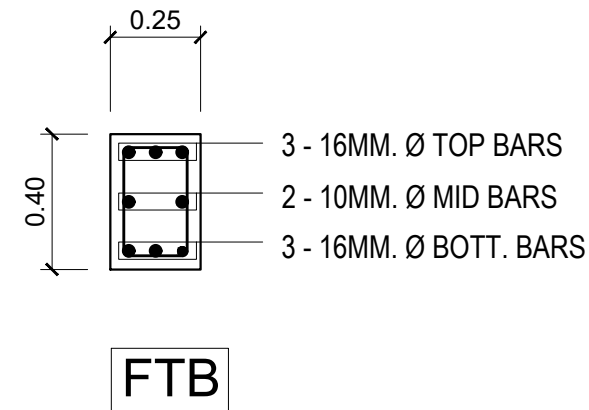


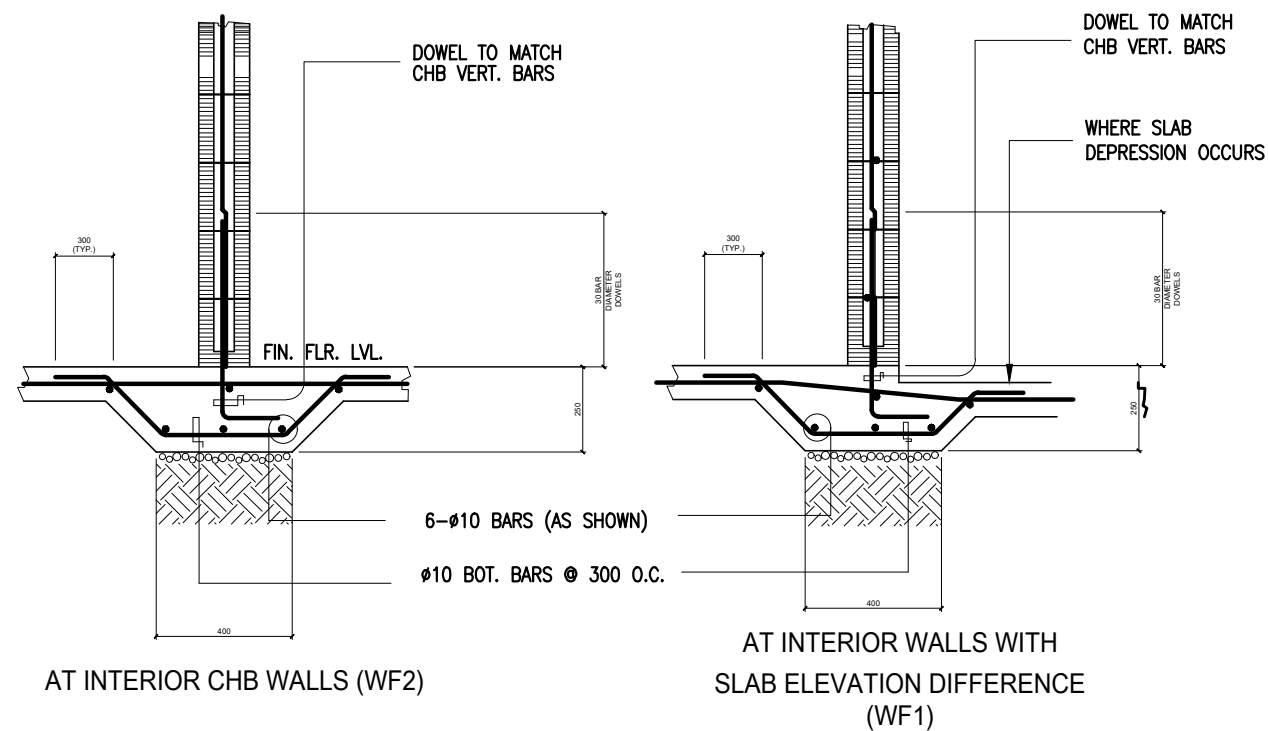

STIRRUPS FOR ALL BEAMS

10MM Ø STIRRUPS
 4 @0.05, 6 @0.075
 8 @0.10, REST@ 0.15 O.C.

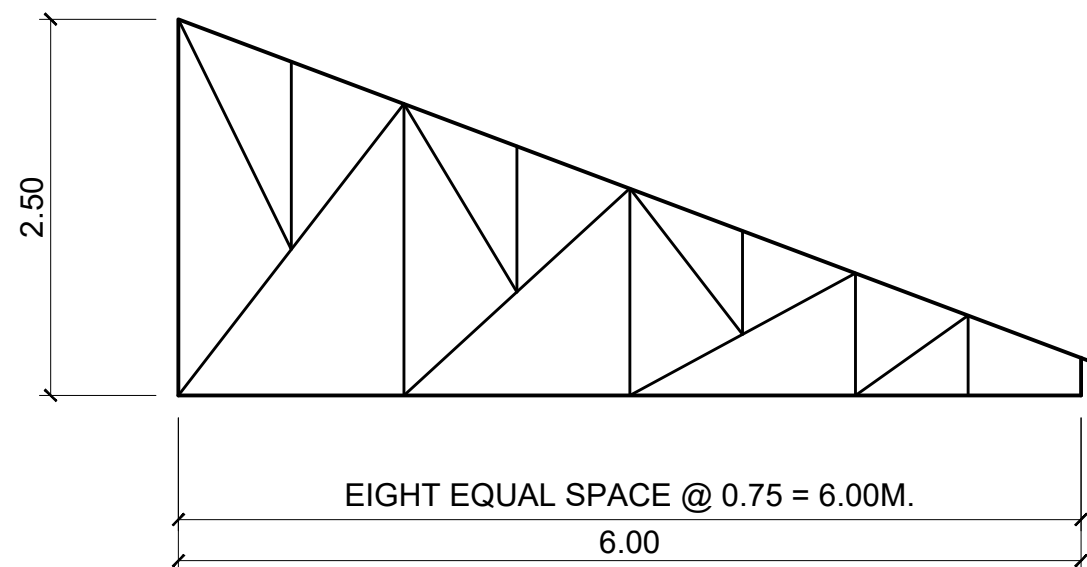

HT 1

NOTE:

- USE THE FOLLOWING:
- 2 - 2½" X 2½" X ¼" THK. ANGULAR BAR FOR TOP CHORDS, BOTTOM CHORDS, & KING POSTS
 - 2 - 2" X 2" X ¼" THK. ANGULAR BAR FOR WEB MEMBERS
 - 6mm THICK GUSSET PLATES ON ALL JOINTS
 - 16mm Ø ROUND BAR CROSS BRACING W/ TURN BUCKLES
 - 12mm Ø ROUND BAR SAG ROD AT MIDDLE THIRD
 - 50mm x 125mm x 1.5mm CEE PURLINS SPACED @ 0.60m O.C.
 - 12mm THICK BASE PLATES
 - 16mm Ø ANCHOR BOLTS

BID BULLETIN

REHABILITATION OF FOUR ACADEMIC BUILDING

AT NAIC CAMPUS